Global AGV L20

Standard stacker converted into an AGV

Our Global AGV L20 is based on thoroughly tested standard vehicle, which is converted into an AGV with several efficient safety functions. Thus, this AGV has an extremely high safety level, which prevents damage and accidents in the warehouse or production. The Global AGV L20 is suitable, but not limited to EUR-pallets. For other types, please contact us.

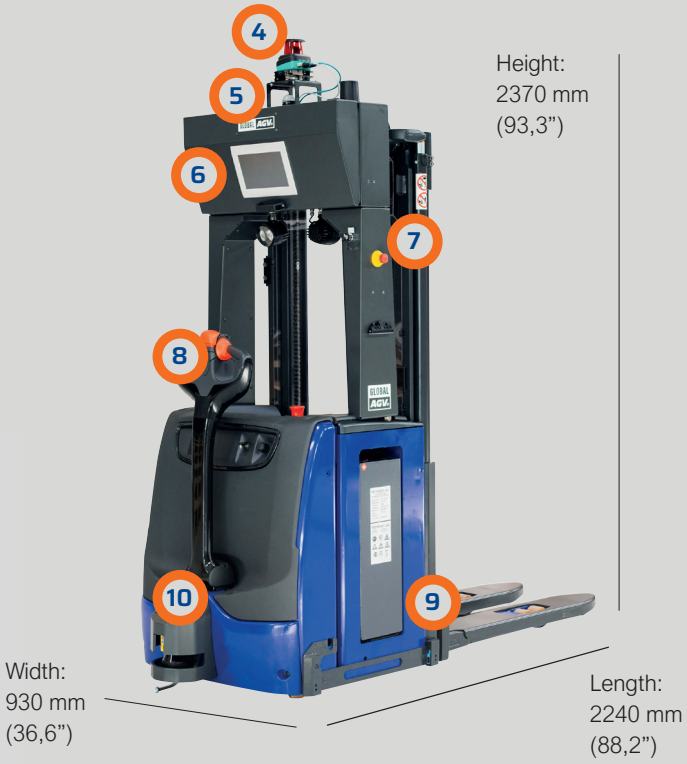

AGV shown with standard and optional equipment

1. Warning signal (side)
2. Load sensor
3. Fork sensors
4. Lidar scanner (navigation)
5. Warning signal (Light and sound)
6. Touchscreen
7. Emergency stop
8. Tiller for manual operation
9. Safety sensor (side)
10. Safety scanner (front)
11. Safety scanner (rear)

Suitable, but not limited to EUR-pallets.

For other types, please contact us.

Capacity: Lifting height:	2000 kg / 4409 lb Max: 3670 mm (144,5") Limit: 1000 mm (39.4")*
Fork dimensions: Center spacing between forks:	70 x 210 x 1150 mm (2.8" x 8,3" x 45.3") Fixed at 370 mm (15")
Motor: Transmission: Max. speed: Weight:	1.5 kW AC motor Linde LAC transmission 1.2 m/s 1625 + 330 kg. (battery)

*Maximum lifting height for standard operation is 1000 mm (39.4"). Higher lifting is possible on request.

Global AGV · Industrivej 10 · DK-7900 Nykøbing · info@global-agv.com · www.global-agv.com