


# Global AGV L14

## Standard stacker converted into an AGV

Our Global AGV L14 is based on thoroughly tested standard vehicle, which is converted into an AGV with several efficient safety functions. Thus, this AGV has an extremely high safety level, which prevents damage and accidents in the warehouse or production. The Global AGV L14 is suitable, but not limited to EUR-pallets. For other types, please contact us.

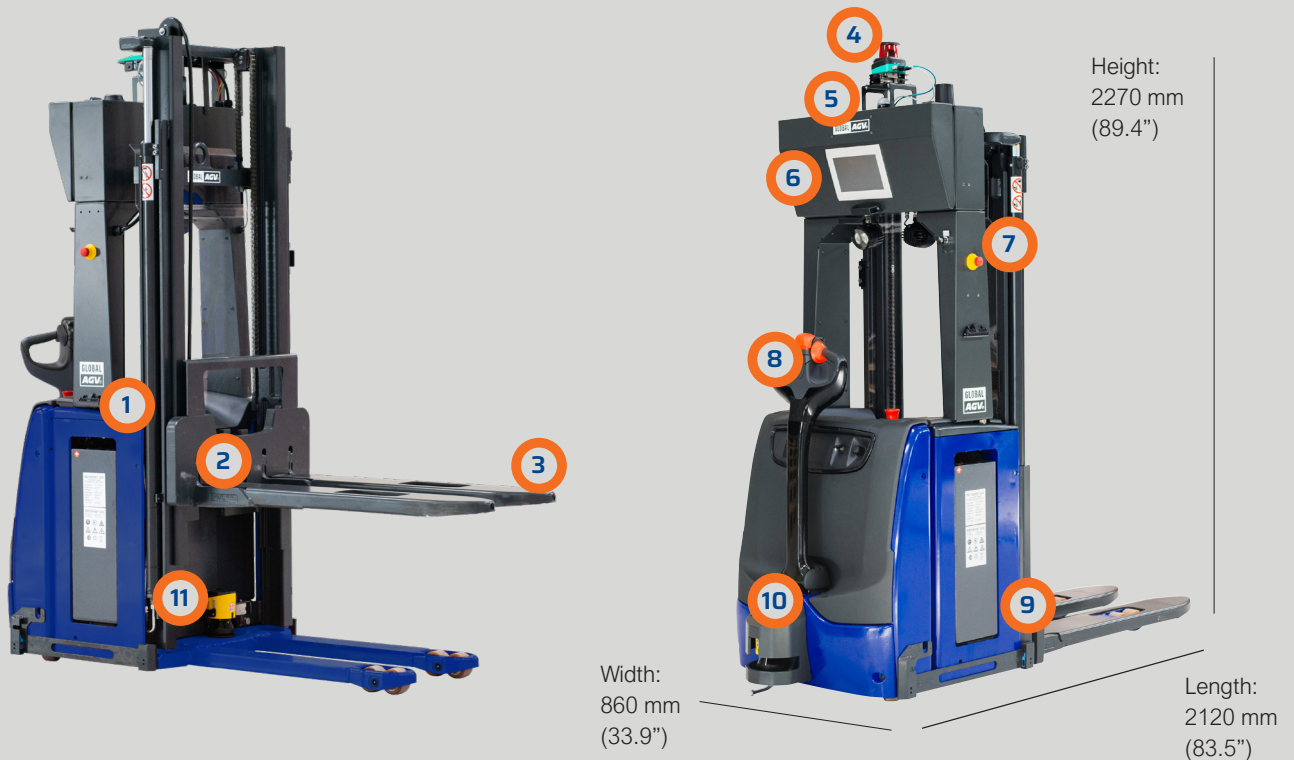

### AGV shown with standard and optional equipment

- |                                    |                               |
|------------------------------------|-------------------------------|
| 1 Warning signal (side)            | 7 Emergency stop              |
| 2 Load sensor                      | 8 Tiller for manual operation |
| 3 Fork sensors                     | 9 Safety sensor (side)        |
| 4 Lidar scanner (navigation)       | 10 Safety scanner (front)     |
| 5 Warning signal (Light and sound) | 11 Safety scanner (rear)      |
| 6 Touchscreen                      |                               |

### Suitable, but not limited to EUR-pallets.

For other types, please contact us.

Capacity:	1400 kg / 3086 lb
Lifting height:	Max: 2844 mm (112") Limit: 1000 mm (39.4")*
Fork dimensions:	60 x 180 x 1150 mm (2.36" x 7.1" x 45.3")
Center spacing between forks:	Fixed at 380 mm (15")
Motor:	1.5 kW AC motor
Transmission:	Linde LAC transmission
Max. speed:	1.2 m/s
Weight:	1040 + 330 kg. (battery)

\*Maximum lifting height for standard operation is 1000 mm (39.4"). Higher lifting is possible on request.